





Zero Client **Atrust** m300

Atrust m300 is a zero client designed as an endpoint of a shared resource system, such as a MultiPoint Server™ or Useful MultiSeat™ Linux system. The solution enables a host server to power multiple and independent stations. Each station only consists of one station hub (zero client) with a keyboard, mouse, and monitor connected, allowing multiple users to share the computing power of one single server. Simply through a USB connection, the server provides each station user with a familiar and independent Windows® experience.

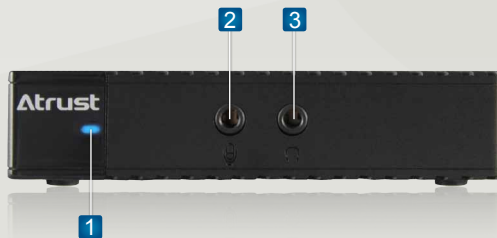

- 1 Power LED**
Indicates the status of power.
- 2 Microphone Port**
Connects to a microphone.
- 3 Headphone Port**
Connects to a set of headphones or a speaker system.
- 4 USB Port**
Connects to a mouse.

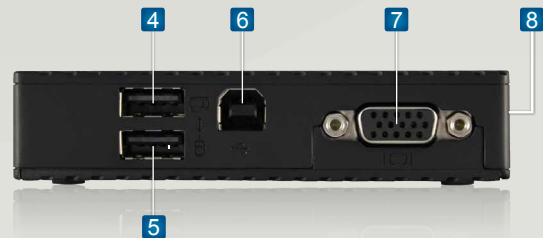

- 5 USB Port**
Connects to a keyboard.
- 6 USB Port**
Connects to the host server.
- 7 VGA Port**
Connects to a monitor.
- 8 Kensington Lock Slot**
Attach your m300 to a permanent object with the Kensington slot and a security cable.

Atrust m300 Features

- ▶ **Low total cost of ownership**
Additional computing access is as simple as adding more I/O devices. The total cost of ownership is then drastically reduced.
- ▶ **Low power consumption**
Powered by a host server through a USB cable, m300 significantly reduces energy consumption and improves energy efficiency.
- ▶ **Slim and quiet design**
m300 is feather light weighing only 104g. The slim design allows it to be mounted to the back of a monitor with a VESA mount. Together with its fanless design, m300 helps create a simple and noiseless workplace environment.



- ▶ **Simple plug and play setup**
Just attach a keyboard, mouse, and monitor to your m300, and then connect it to the host server. A station is set up easily and ready for use right away.
- ▶ **Easy management and maintenance**
Since all computing tasks are performed on a server, all hardware and software issues are significantly reduced on the client side. All user management, software installations, system management, and upgrades are done on a single server.

Atrust m300

System	
Main Chip	SOC SMSC UFX6000
Graphics	
Maximum resolutions	1920 x 1080
I/O Interfaces	
Video	VGA-type video output (D-sub 15)
I/O ports	1 x VGA 1 x USB B type (to the host server) 2 x USB A type (for keyboard and mouse) 1 x headphone 1 x microphone 1 x Kensington lock slot
Networking	
Host connection	USB 2.0
USB cable	3 meters USB cable with B type connector
Dimensions / Weight	
Dimensions	(W) 100 x (D) 66 x (H) 23 mm
Weight	104g (approximate)
Environment	
Cooling	Fanless
Operating noise	No noise
Operating temperature	0°C ~ 35°C
Non-operating temperature	-30°C ~ 60°C
Operating humidity (Rh)	10% ~ 90% (non-condensing)
Non-operating humidity (Rh)	5% ~ 95%
Server OS Support	Windows® MultiPoint™ Server 2011 Useful MultiSeat™ Linux 2011
Regulatory	CB, FCC, CE, BSMI, NRTL
Option	VESA Mount Kit (W) 114 x (D) 60 x (H) 6 mm

© 2012 Atrust Computer Corp. The information contained herein is subject to change without notice. Atrust shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are trademarks of the Microsoft group of companies. To learn more, visit www.Atrustcorp.com.